



SQ 2, SQ 2-N, SQE 2, SQE 2-N

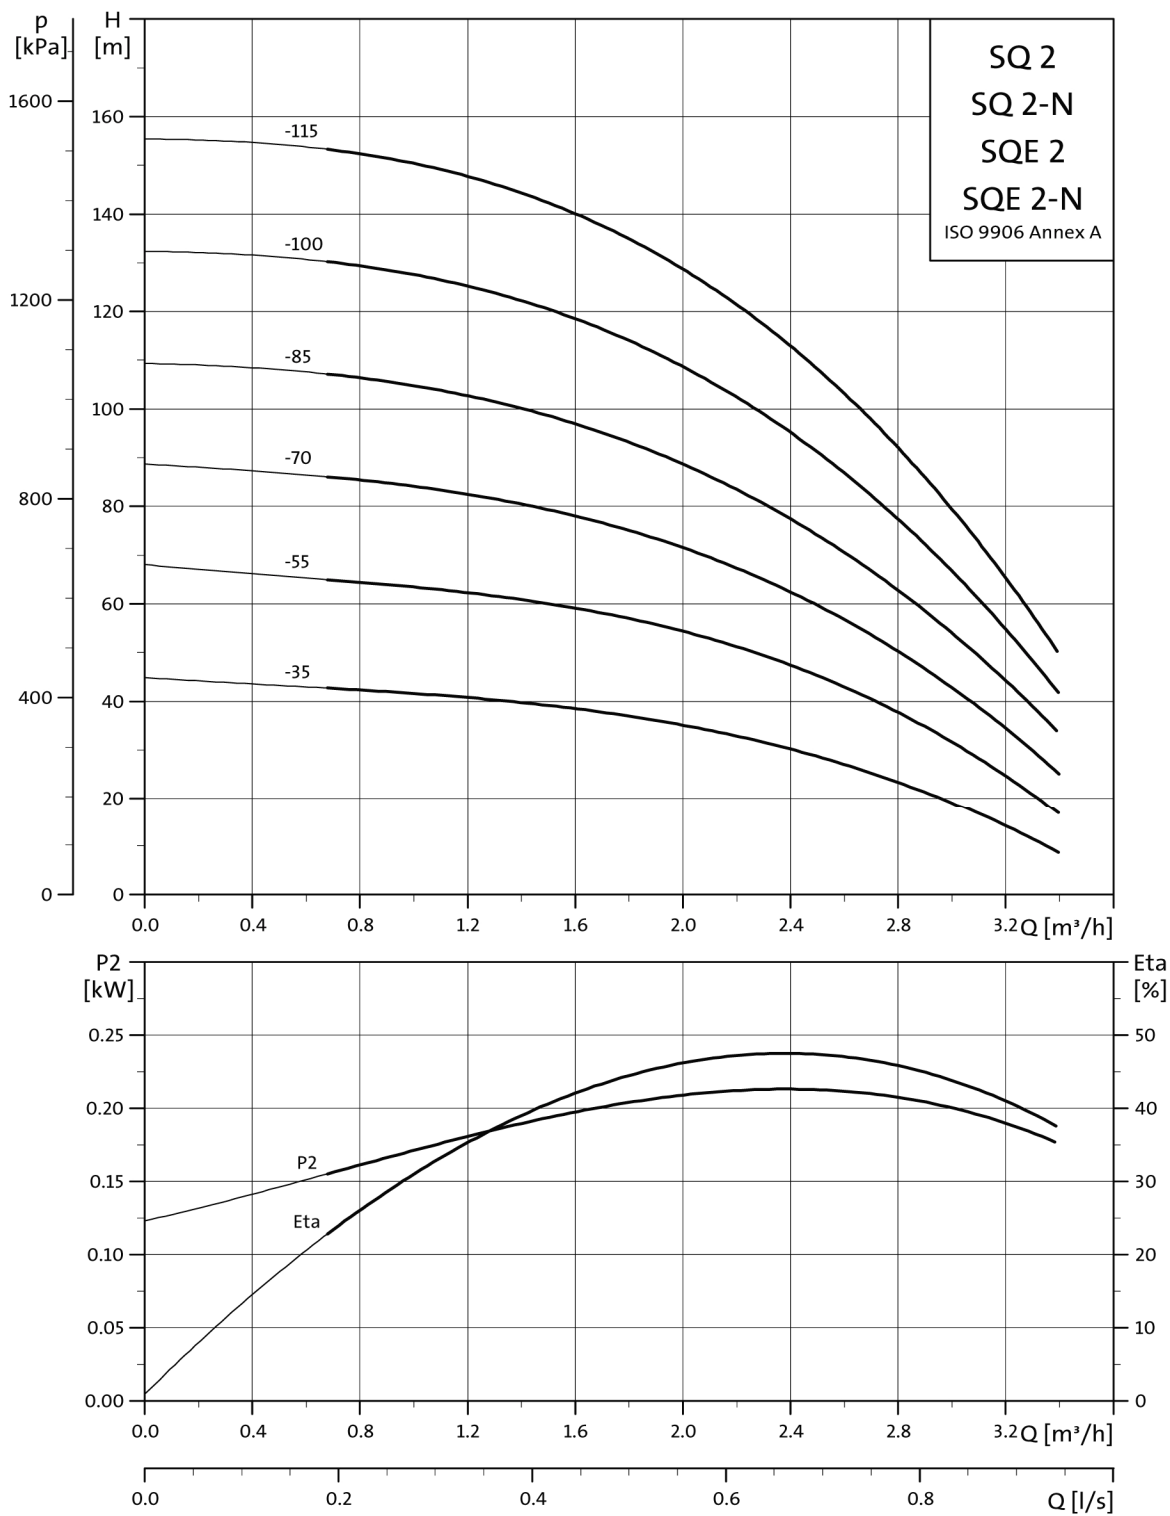

TM01 2693 4304

Wymiary i masa

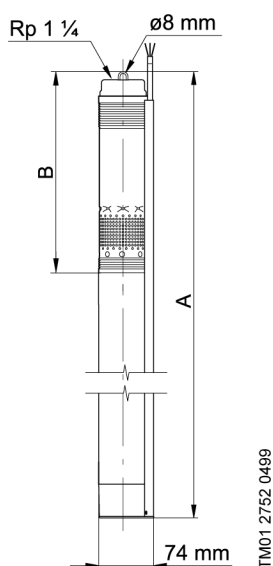

TM01 2752 0499

Typ pompy	Liczba stopni	Silnik Typ	Moc wyjściowa (P ₂) [kW]	Wymiary [mm]		Masa netto [kg]*	Objętość wysyikowa [m ³]*
				A	B		
SQ 2-35 (-N)	2	MS 3 (-NE)	0,70	741	265	4,7	0,0092
SQE 2-35 (-N)		MSE 3 (-NE)					
SQ 2-55 (-N)	3	MS 3 (-NE)	0,70	741	265	5,2	0,0092
SQE 2-55 (-N)		MSE 3 (-NE)					
SQ 2-70 (-N)	4	MS 3 (-NE)	1,15	768	292	5,4	0,0094
SQE 2-70 (-N)		MSE 3 (-NE)					
SQ 2-85 (-N)	5	MS 3 (-NE)	1,15	825	346	6,2	0,0104
SQE 2-85 (-N)		MSE 3 (-NE)					
SQ 2-100 (-N)	6	MS 3 (-NE)	1,68	861	346	6,2	0,0104
SQE 2-100 (-N)		MSE 3 (-NE)					
SQ 2-115 (-N)	7	MS 3 (-NE)	1,85	888	373	6,3	0,0107
SQE 2-115 (-N)		MSE 3 (-NE)					

* pompa z silnikiem, 1,5 m kablem i osłoną kabla.

Dane elektryczne

1 x 200-240 V, 50/60 Hz

Typ pompy	Typ silnika	Moc wejściowa silnika (P ₁) [kW]	Moc wyjściowa silnika (P ₂) [kW]	Wymagana moc wejściowa pompy [kW]	Prąd pełnego obciążenia I _{1/1} [A]		Sprawność silnika przy pełnym obciążeniu (η) [%]
					230 V	200 V	
SQ 2-35 (-N)	MS 3 (-NE)	0,69	0,70	0,45	2,9	3,5	70
SQE 2-35 (-N)	MSE 3 (-NE)						
SQ 2-55 (-N)	MS 3 (-NE)	0,95	0,70	0,65	4,1	4,9	70
SQE 2-55 (-N)	MSE 3 (-NE)						
SQ 2-70 (-N)	MS 3 (-NE)	1,22	1,15	0,87	5,3	6,2	73
SQE 2-70 (-N)	MSE 3 (-NE)						
SQ 2-85 (-N)	MS 3 (-NE)	1,36	1,15	0,98	6,0	6,9	73
SQE 2-85 (-N)	MSE 3 (-NE)						
SQ 2-100 (-N)	MS 3 (-NE)	1,80	1,68	1,30	7,7	9,3	74
SQE 2-100 (-N)	MSE 3 (-NE)						
SQ 2-115 (-N)	MS 3 (-NE)	2,02	1,85	1,50	8,9	10,2	74
SQE 2-115 (-N)	MSE 3 (-NE)						